




GENESIS

# Genesis G80

Sedan, 4 doors

From March 2020

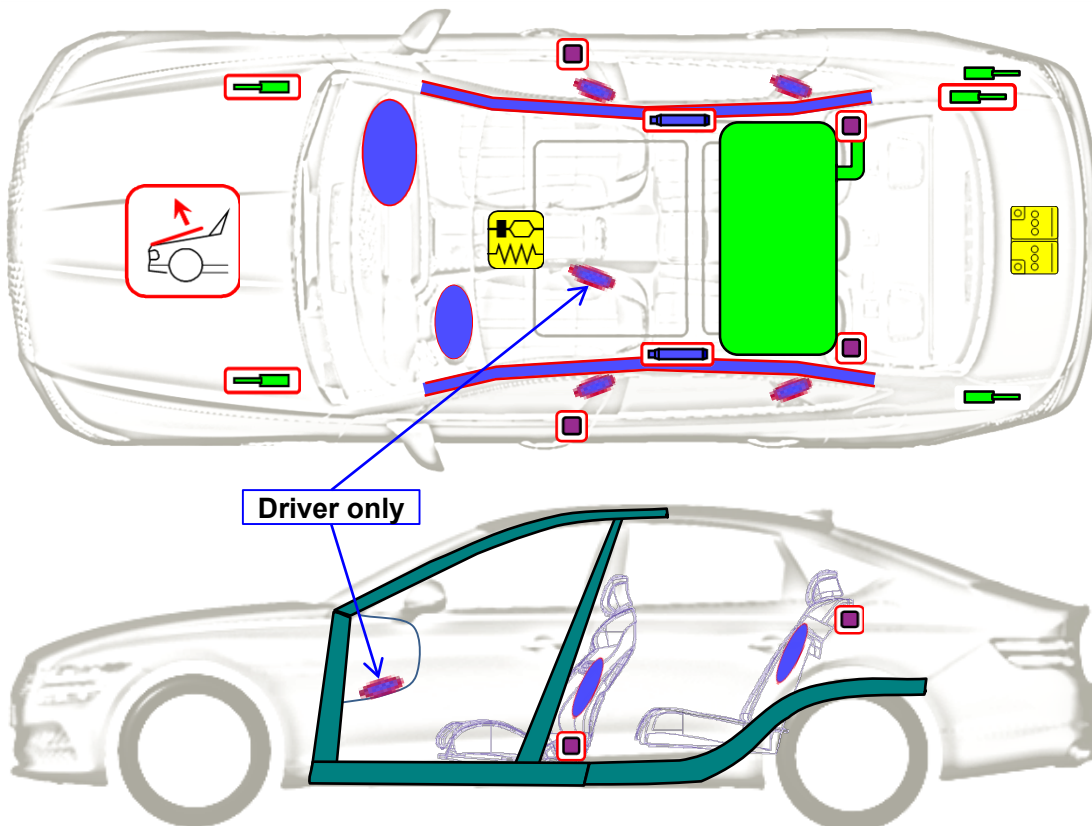


Driver only

Reserved for holes (paper version)


|                       |                                      |  |                                    |  |                         |              |                                        |  |                                     |
|-----------------------|--------------------------------------|--|------------------------------------|--|-------------------------|--------------|----------------------------------------|--|-------------------------------------|
|                       | Airbag                               |  | Stored gas inflator                |  | Seat belt pretensioner  |              | SRS control unit                       |  | Pedestrian protection active system |
|                       | Automatic rollover protection system |  | Gas strut/Preloaded spring         |  | High strength zone      |              | Zone requiring special attention       |  |                                     |
|                       | Battery low voltage                  |  | Ultra capacitor, low voltage       |  | Fuel tank               |              | Gas tank                               |  | Safety valve                        |
|                       | High voltage battery pack            |  | High voltage power cable/component |  | High voltage disconnect |              | Fuse box disabling high voltage system |  | Ultra capacitor, high voltage       |
| ID No.                |                                      |  | Version No.                        |  |                         | Version date |                                        |  | Page                                |
| KMT-RG3-RSI-03-202101 |                                      |  | 03                                 |  |                         | 01/2021      |                                        |  | 1 of 4                              |

1. Identification / recognition

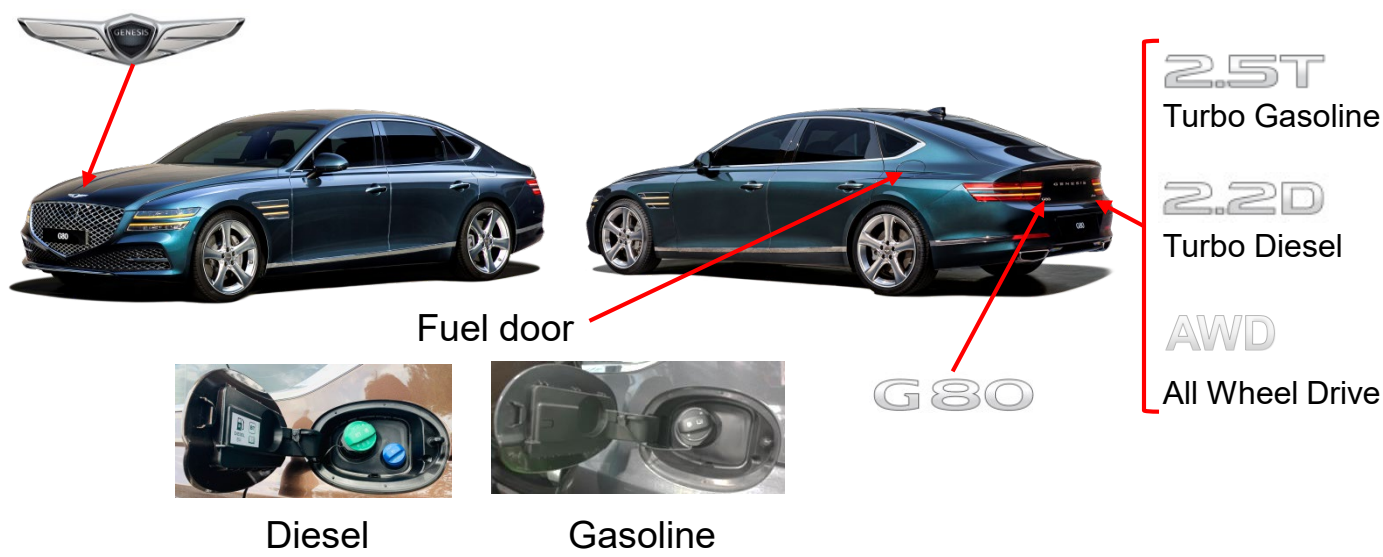


2. Immobilisation / stabilisation / lifting

■ Immobilisation

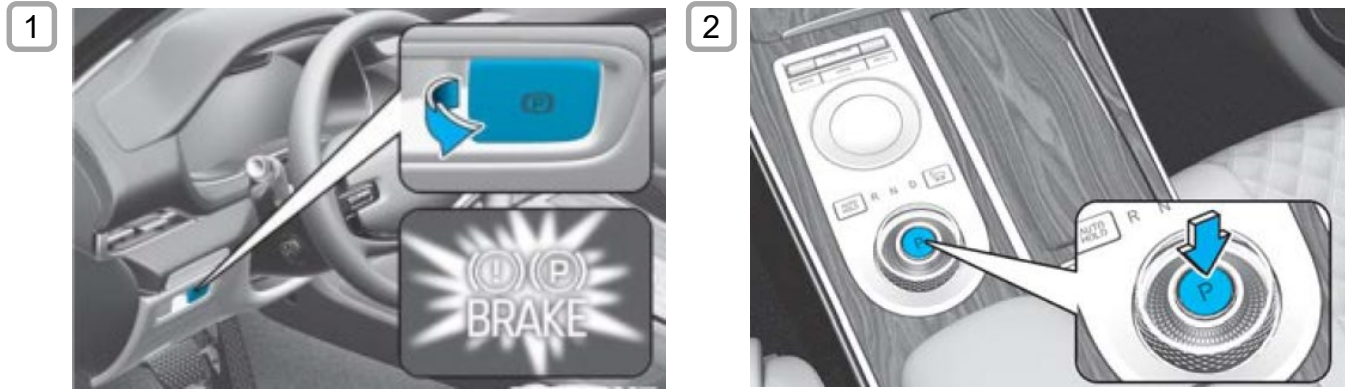

1. Chock the wheels and pull the switch to set the parking brake.
2. For automatic transmission vehicles, shift into park(P) gear.

■ Lifting positions at car underbody: ●

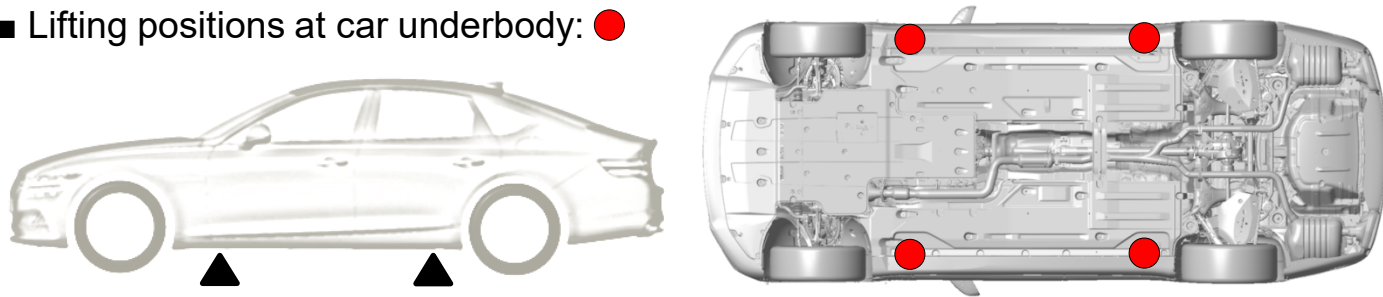

3. Disable direct hazards / safety regulations

■ Access to the battery



1. Press and hold the trunk open button located on the instrument panel to open the power trunk.

or



1. Press the trunk open button located outside the trunk while carrying the smart key to open the power trunk.



2. To access the battery, remove the clip (A) and release the cover (B).

■ Disabling procedure




- 1) Switch off the ignition
- 2) Disconnect the negative terminal (-)
- 3) Disconnect the positive terminal (+)


4. Access to the occupants

Glazing:

- 1 : Laminated
- 2+3: Tempered (Standard)  
Laminated (Optional)
- 4+5: Tempered

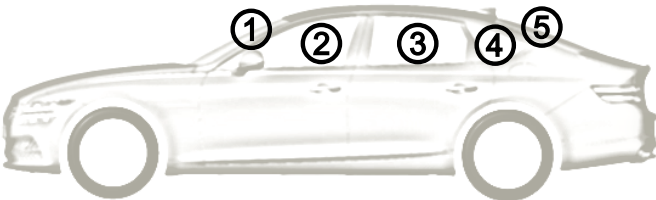

Hardened Steel:

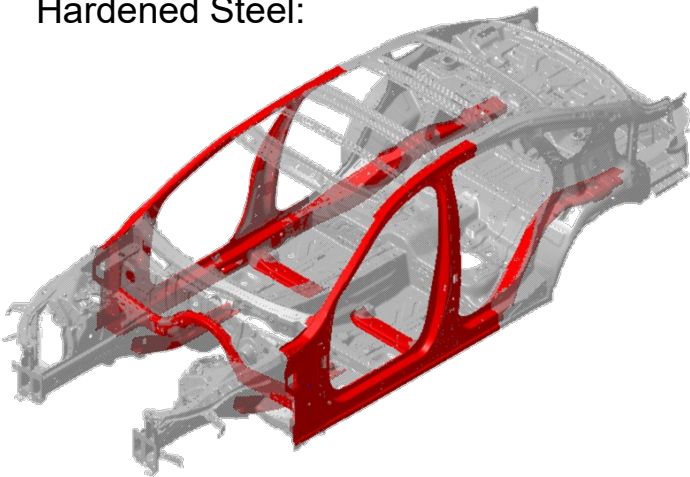

5. Stored energy / liquids / gases / solids

■ Fuel Tank

65ℓ

65ℓ

■ Battery




12 V

|  | ID No.                | Version No. | Version date | Page   |
|--|-----------------------|-------------|--------------|--------|
|  | KMT-RG3-RSI-03-202101 | 03          | 01/2021      | 2 of 4 |

## 6. In case of fire


Gas Strut

→ Risk of missile effect

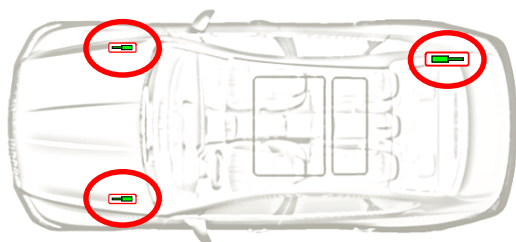


Pedestrian protection active system

→ Pyrotechnical actuators

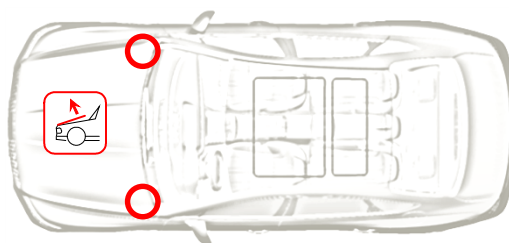


## 8. Towing / transportation / storage

**OK :**

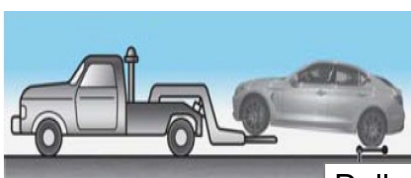

Dolly

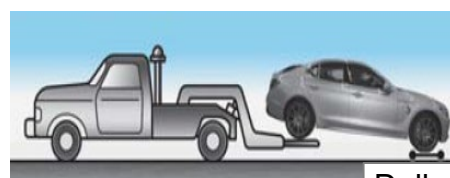

Dolly

Notice: AWD (All Wheel Drive) vehicle must be towed with all wheels off the ground, either on a flatbed tow truck or using dollies.

**Not OK :**



Notice :

Do not tow with sling-type equipment. Use a wheel lift or flatbed equipment.  
Do not tow the vehicle with the rear wheels on the ground as this may cause damage to the vehicle.

|  | ID No.                | Version No. | Version date | Page   |
|--|-----------------------|-------------|--------------|--------|
|  | KMT-RG3-RSI-03-202101 | 03          | 01/2021      | 2 of 4 |