




GENESIS


Genesis GV80

SUV, 4 doors


From March 2020

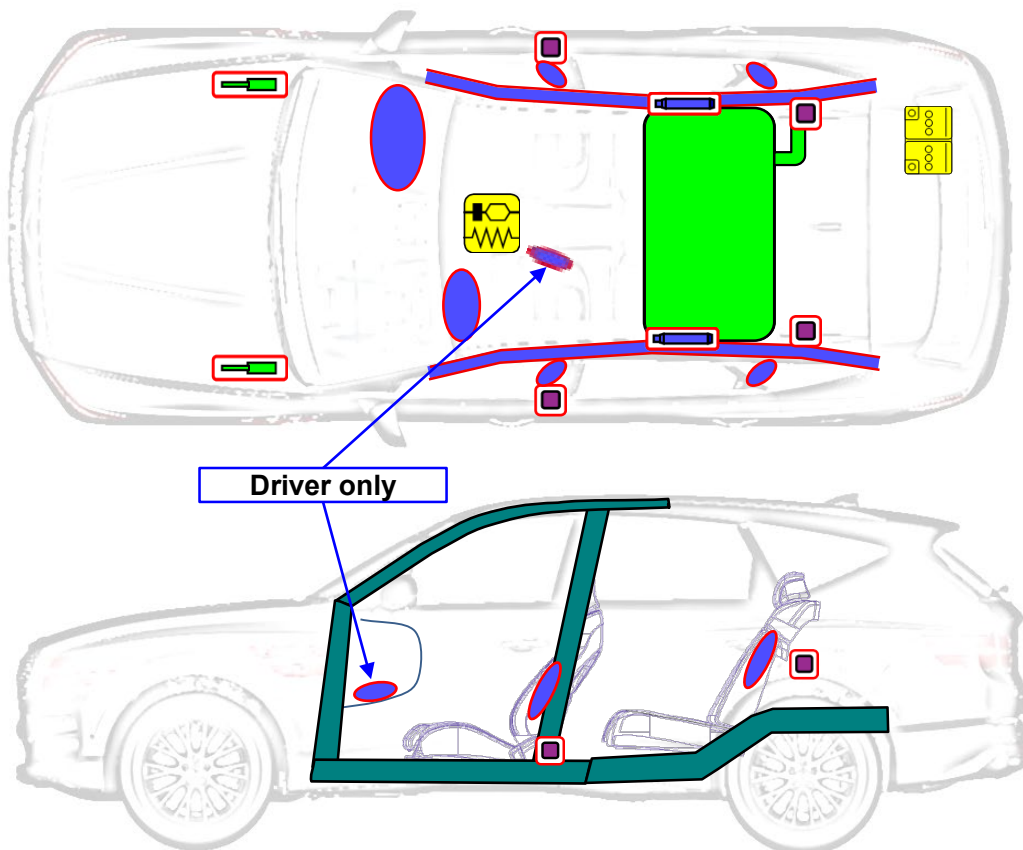

Driver only



Airbag



Stored
gas inflator



Seat belt
pretensioner



SRS
control unit



Pedestrian
protection
active
system



Automatic
rollover
protection
system



Gas strut/
Preloaded
spring



High
strength
zone



Zone
requiring
special
attention



Battery
low voltage



Ultra
capacitor,
low voltage



Fuel tank



Gas tank



Safety
valve



High voltage
battery pack



High voltage
power cable/
component



High voltage
disconnect



Fuse box
disabling
high voltage
system



Ultra
capacitor,
high voltage

ID No.

Version No.

Version date

Page

KMT-JX1-RSI-03-202101

03

01/2021

1 of 4


1. Identification / recognition

Brand Emblem




2. Immobilisation / stabilisation / lifting

■ Immobilization

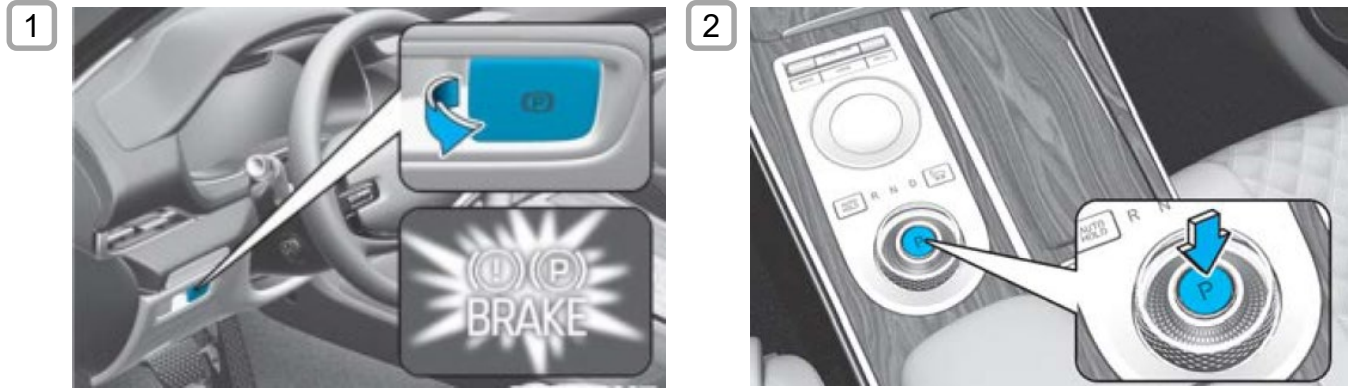

1. Chock the wheels and pull the switch to set the parking brake.
2. For automatic transmission vehicles, shift into park (P) gear.

■ Lifting points under the vehicle : ■

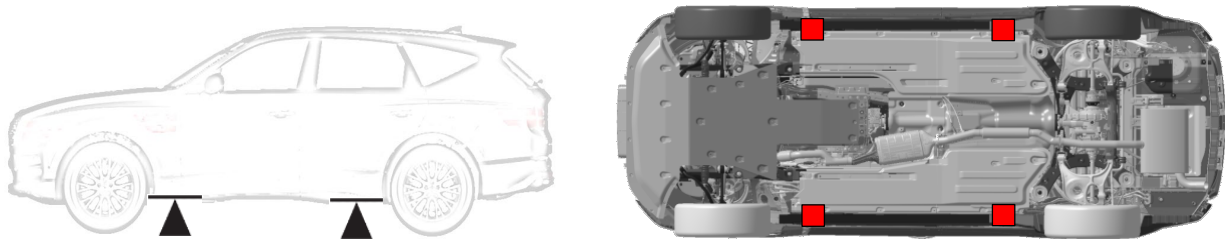

	ID No.	Version No.	Version date	Page
	KMT-JX1-RSI-03-202101	03	01/2021	2 of 4

3. Disable direct hazards / safety regulations

■ Access to the battery




1. Press and hold the tailgate open button located on the instrument panel to open the power tailgate.

or



1. Press the tailgate open button located outside the tailgate while carrying the smart key to open the power tailgate.

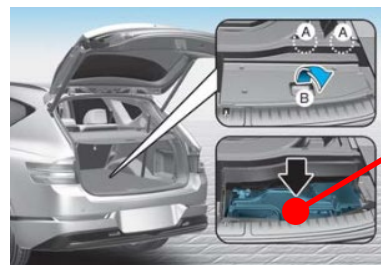

2. To access the battery, remove the clip (A) and release the cover (B).



■ Disabling procedure



① Turn the ignition switch off



② Disconnect the negative(-) terminal



③ Disconnect the positive(+) terminal

4. Access to the occupants

■ Glass

1: Laminated


2+3: Tempered (Standard), Laminated(OPT)

4+5: Tempered



■ Vehicle body

Hardened Steel

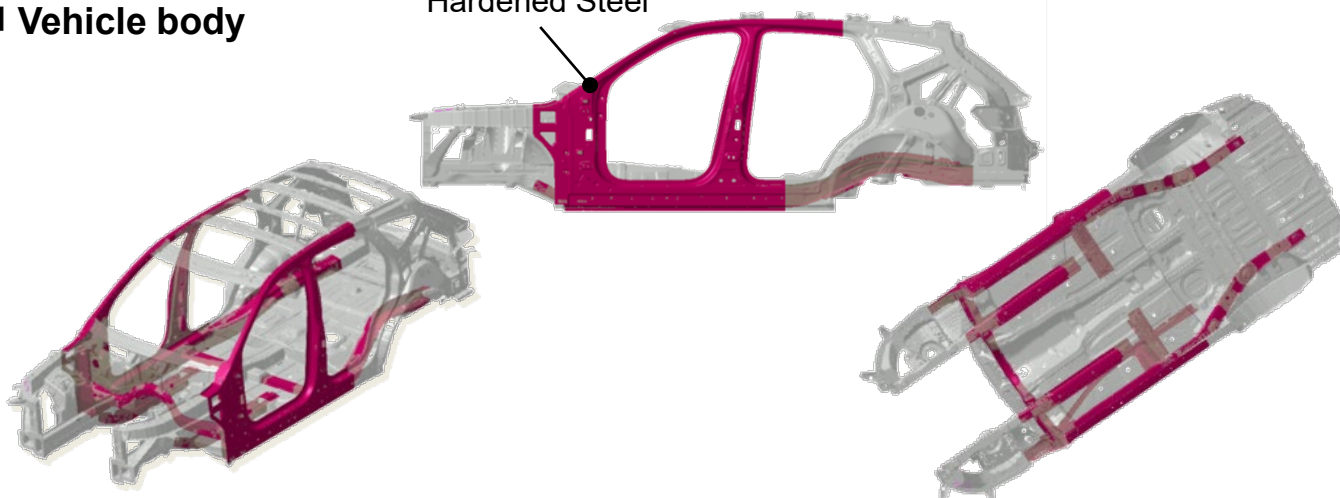

	ID No.	Version No.	Version date	Page
	KMT-JX1-RSI-03-202101	03	01/2021	3 of 4

5. Stored energy / liquids / gases / solids

■ Fuel Tank

80ℓ

80ℓ

■ Battery




12 V

6. In case of fire

■ Gas Strut




- Risk of missile effect of hood.

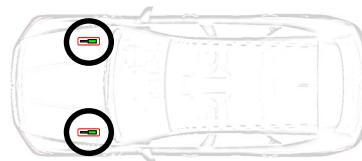


8. Towing / transportation / storage

OK :

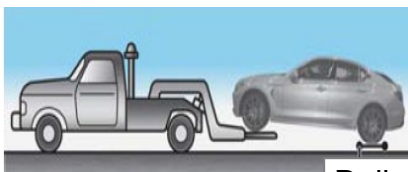

Dolly

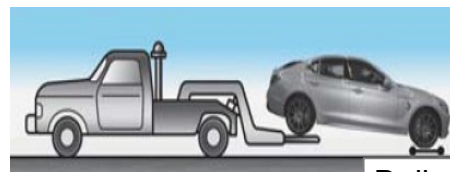


Dolly

Notice:

A towed AWD (All Wheel Drive) vehicle must have all its wheels off the ground.
Keep it on a flatbed tow truck or use dollies.

Not OK :

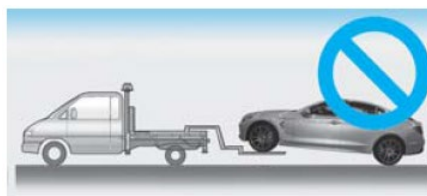

Notice :

Do not tow with sling-type equipment.
Do not tow the vehicle with the rear wheels on the ground.
This could damage the vehicle.

9. Important additional information

Standard equipment includes 2 seating rows (max. 5 occupants)

Optional equipment includes 3rd seating row (max. 7 occupants)

	ID No.	Version No.	Version date	Page
	KMT-JX1-RSI-03-202101	03	01/2021	4 of 4